

FIG. 1

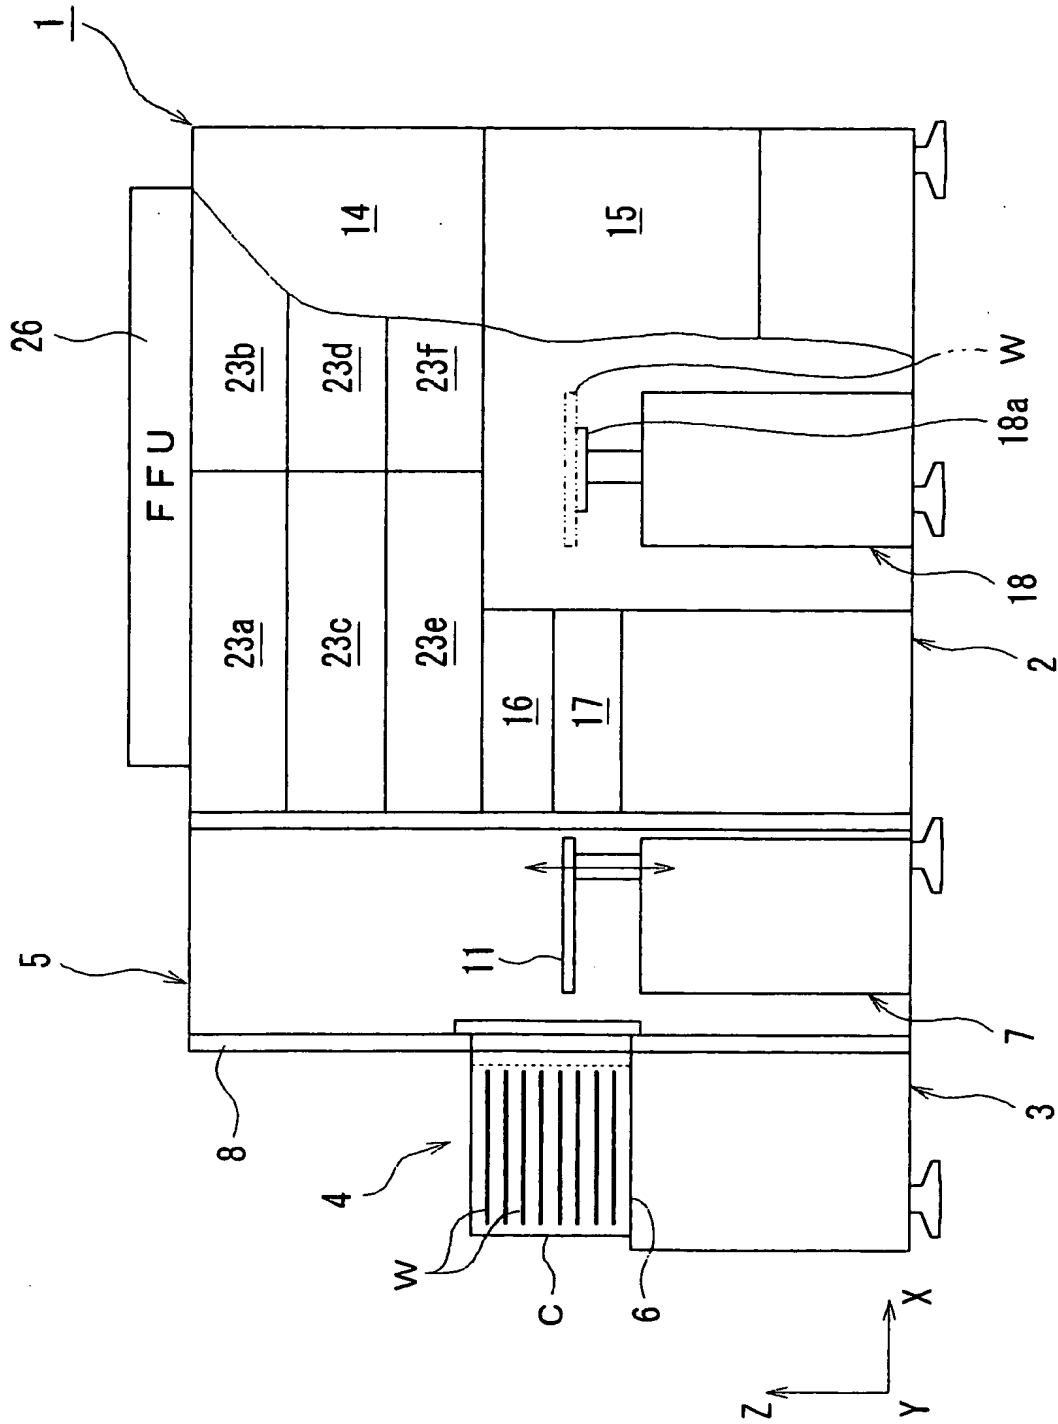


FIG. 2

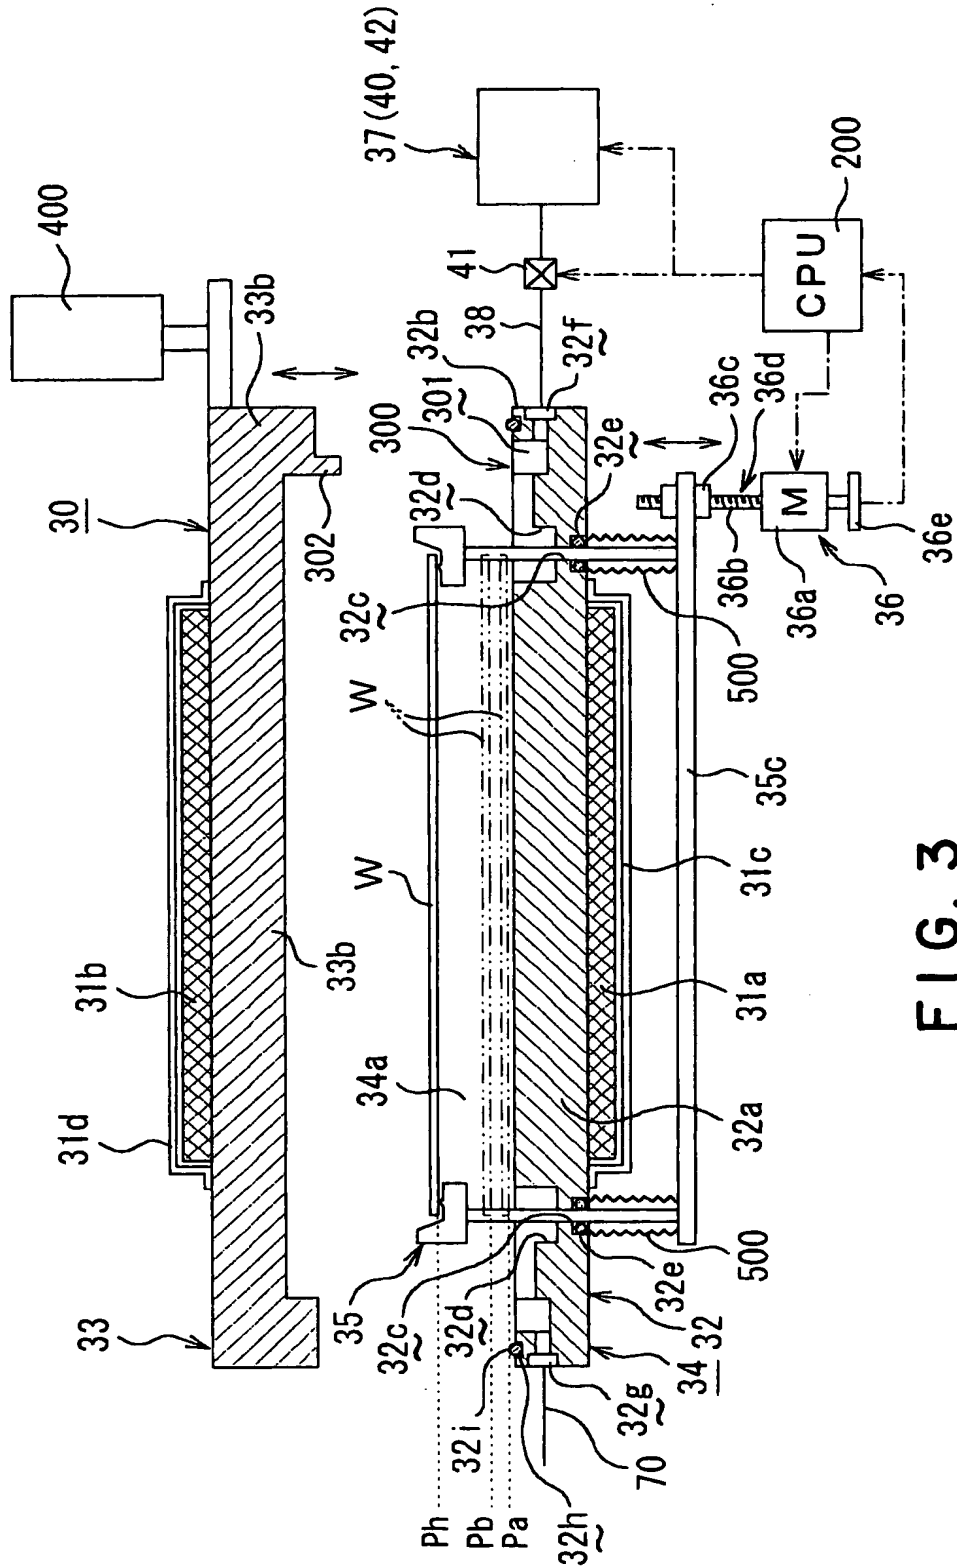


FIG. 3

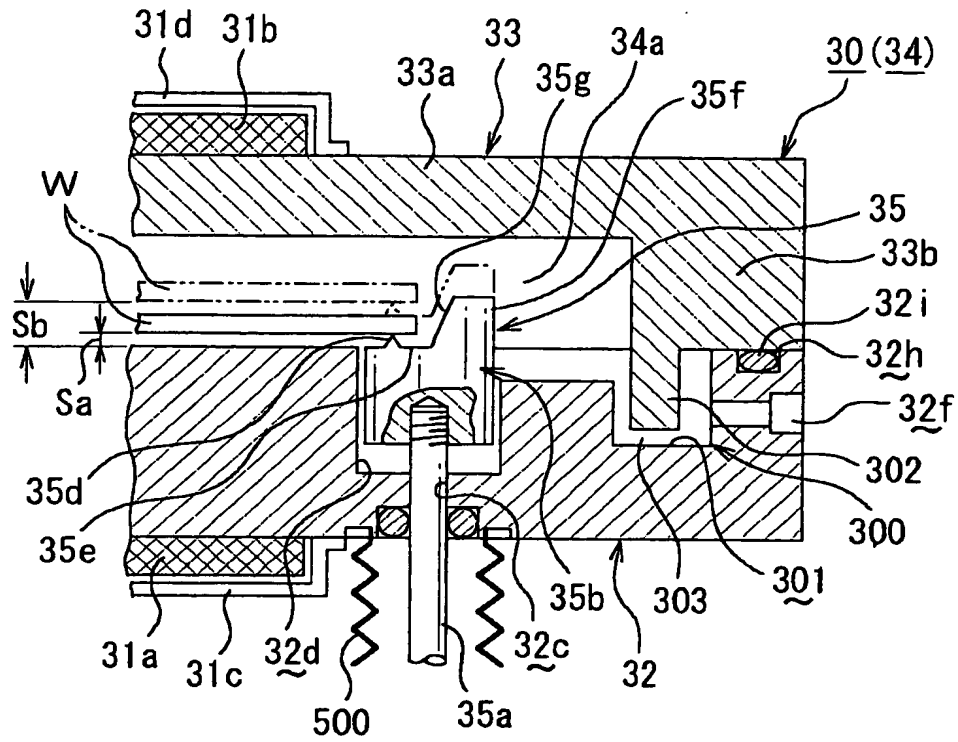


FIG. 4

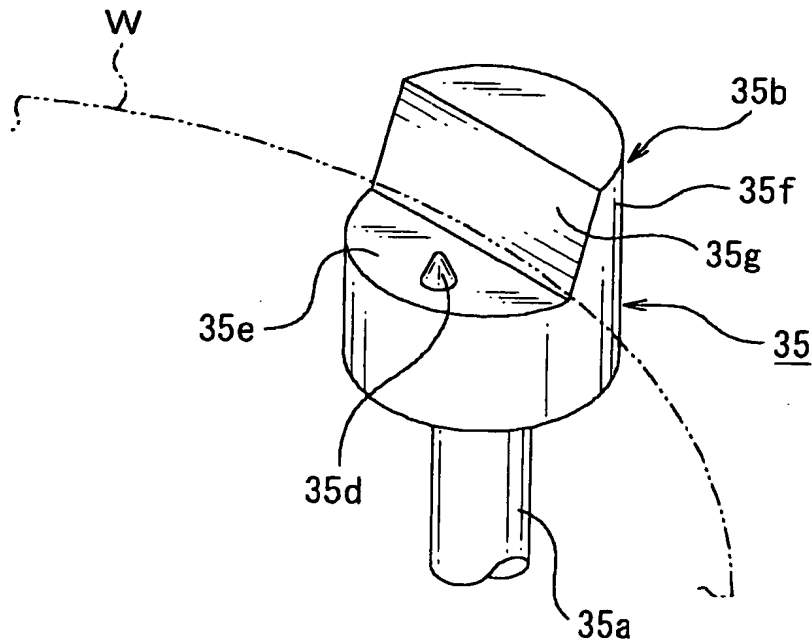


FIG. 5

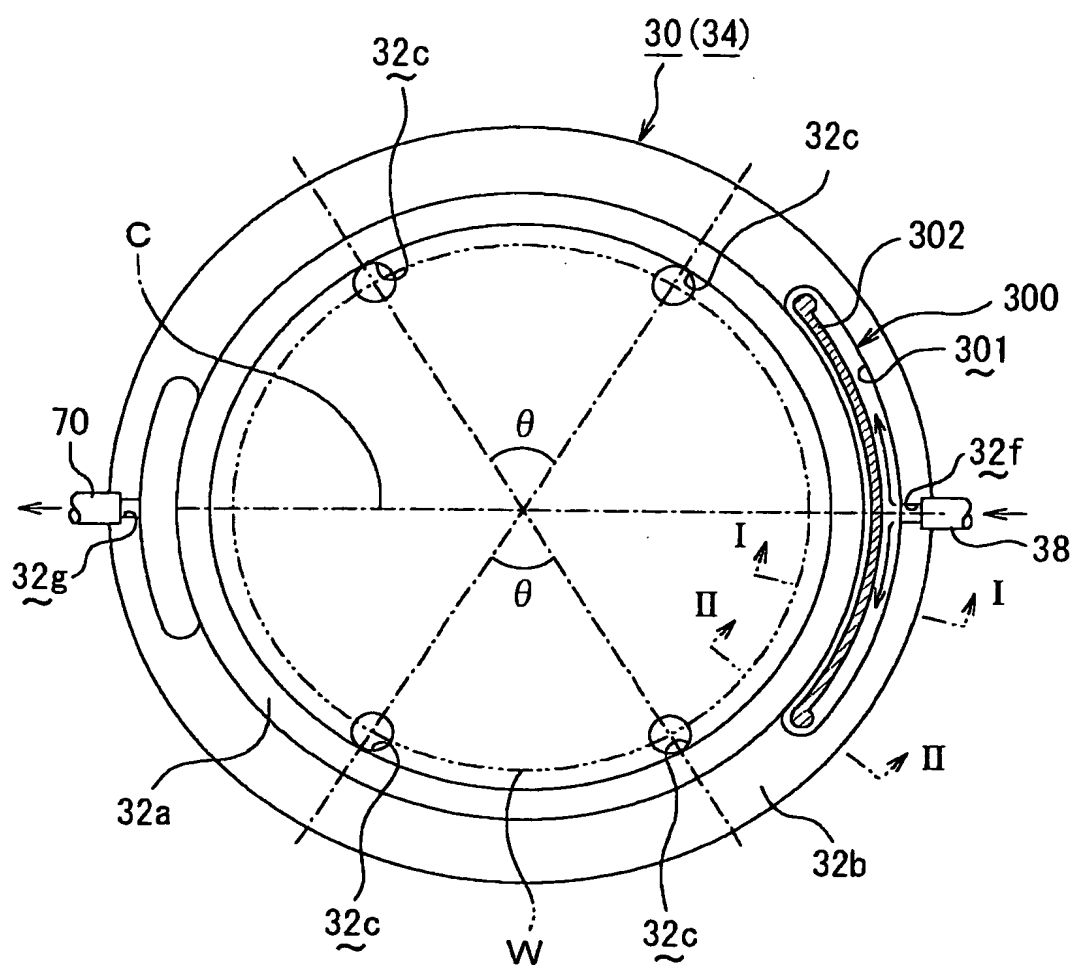


FIG. 6A

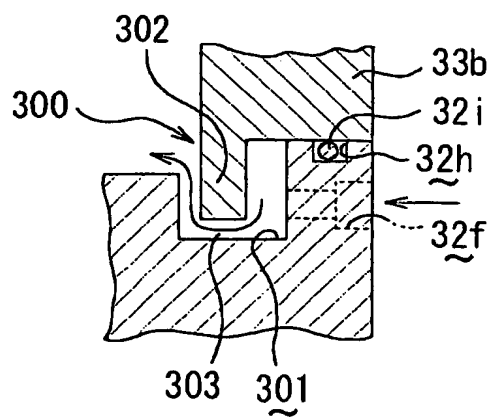


FIG. 6B

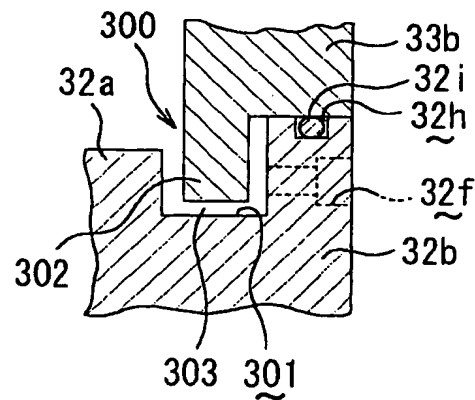


FIG. 6C

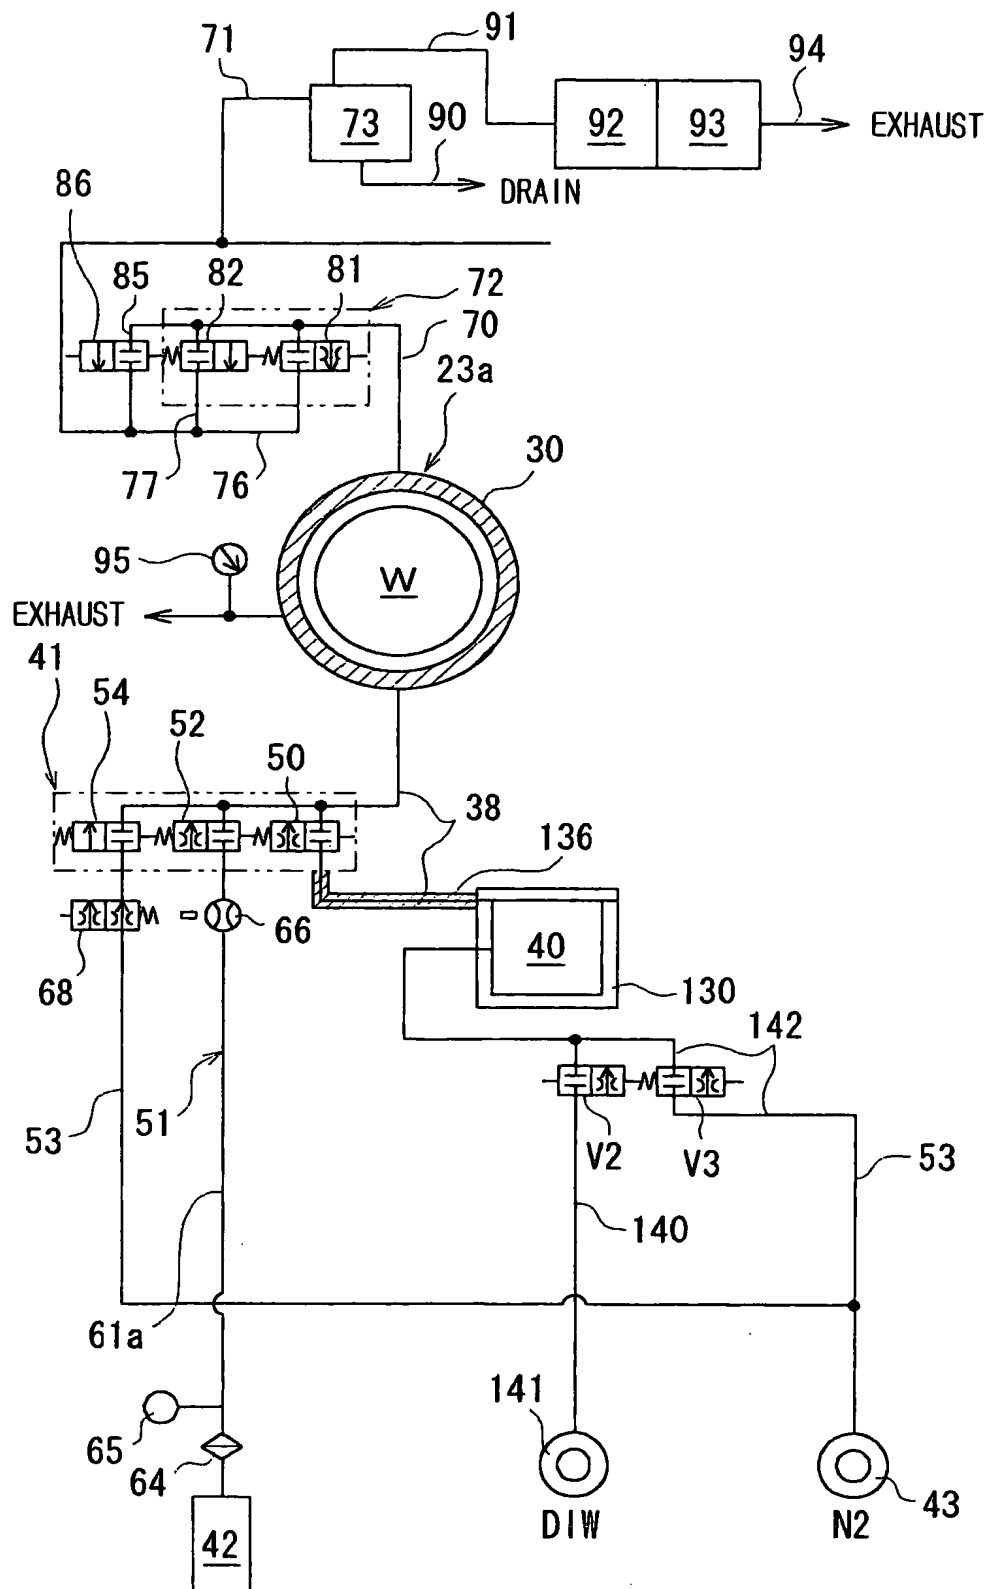


FIG. 7

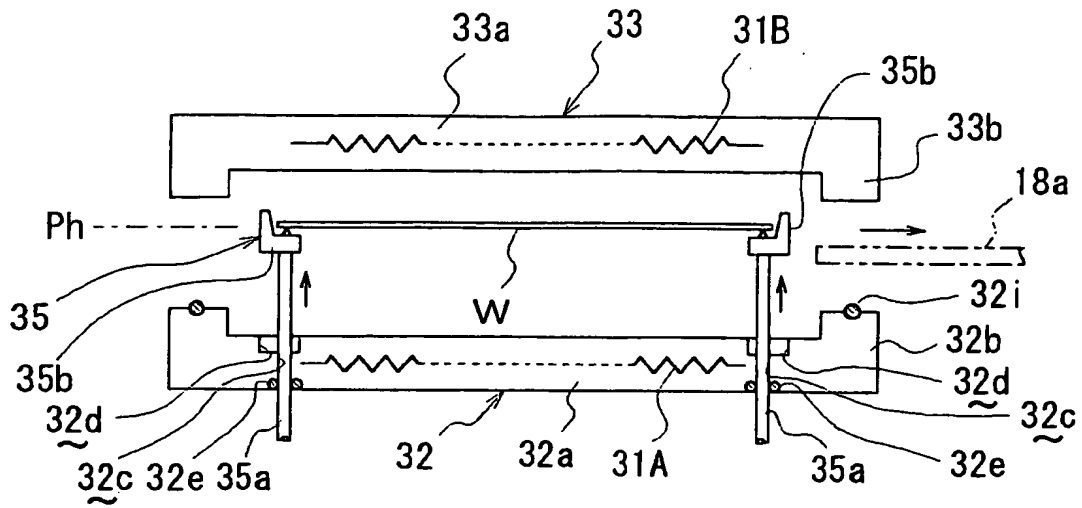


FIG. 8A

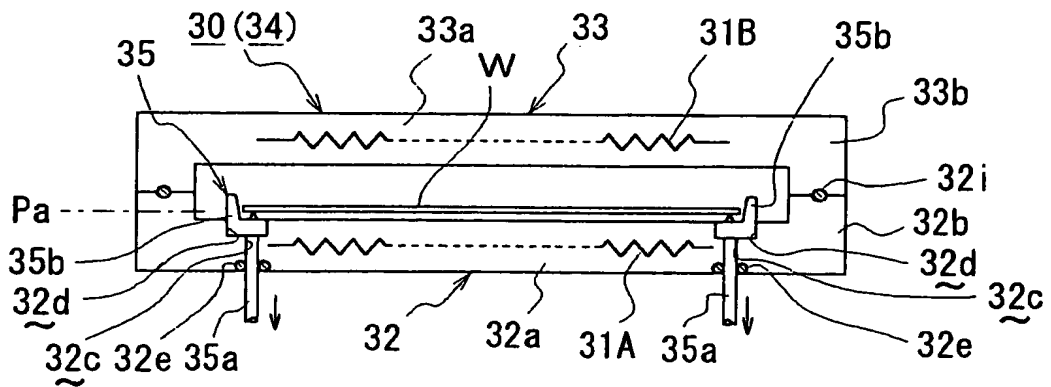


FIG. 8B

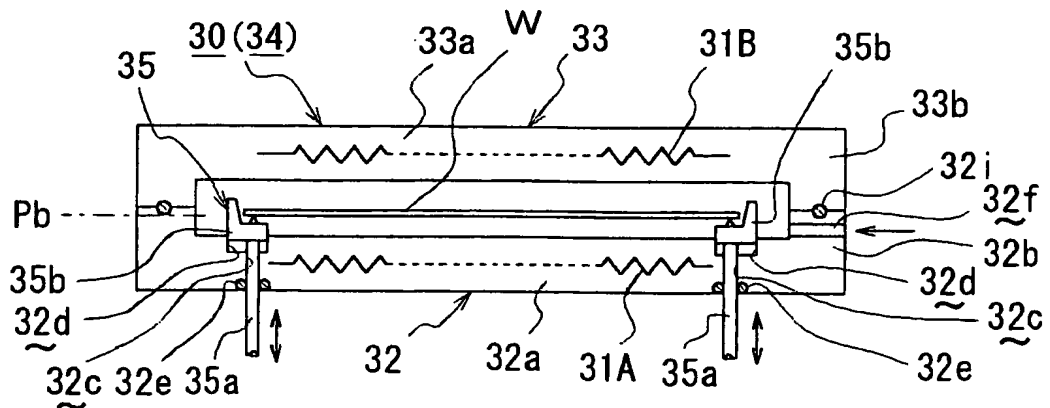


FIG. 8C

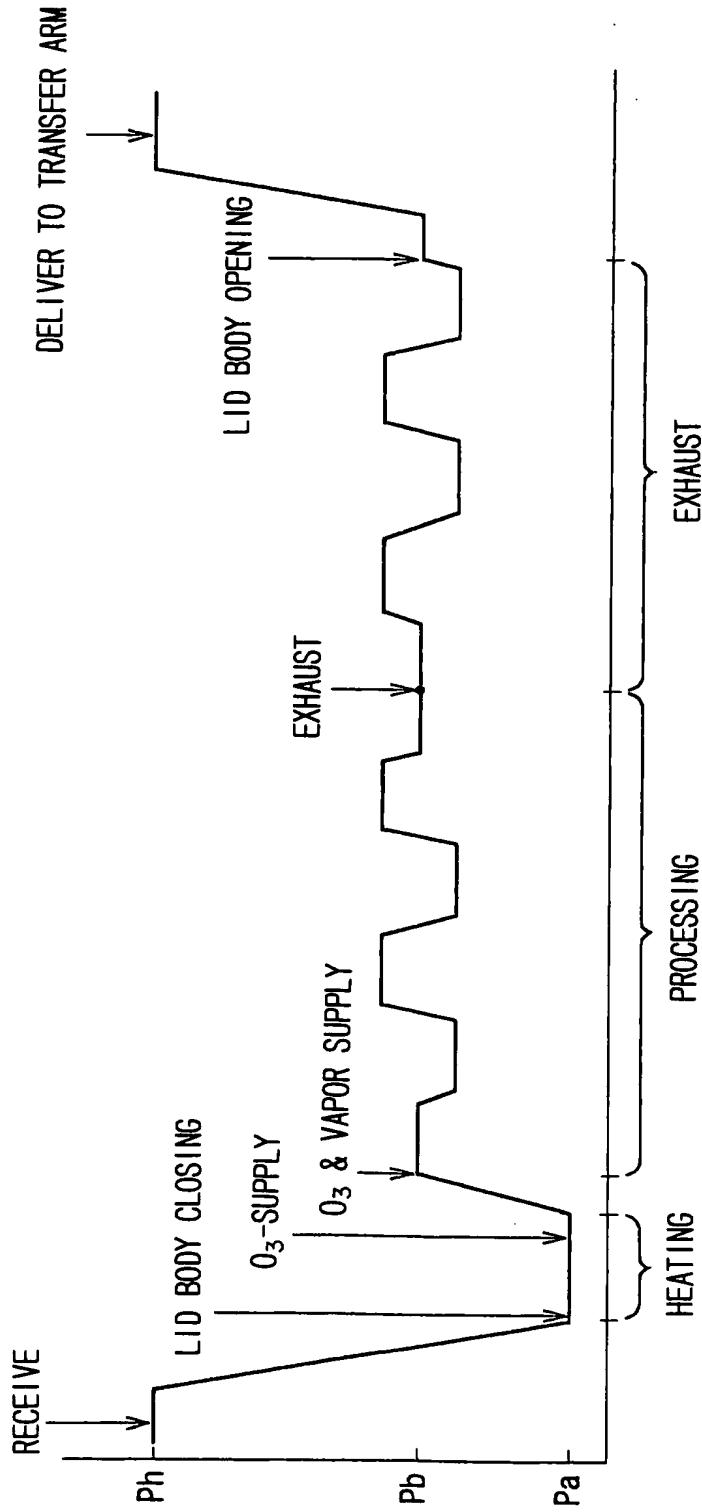


FIG. 9

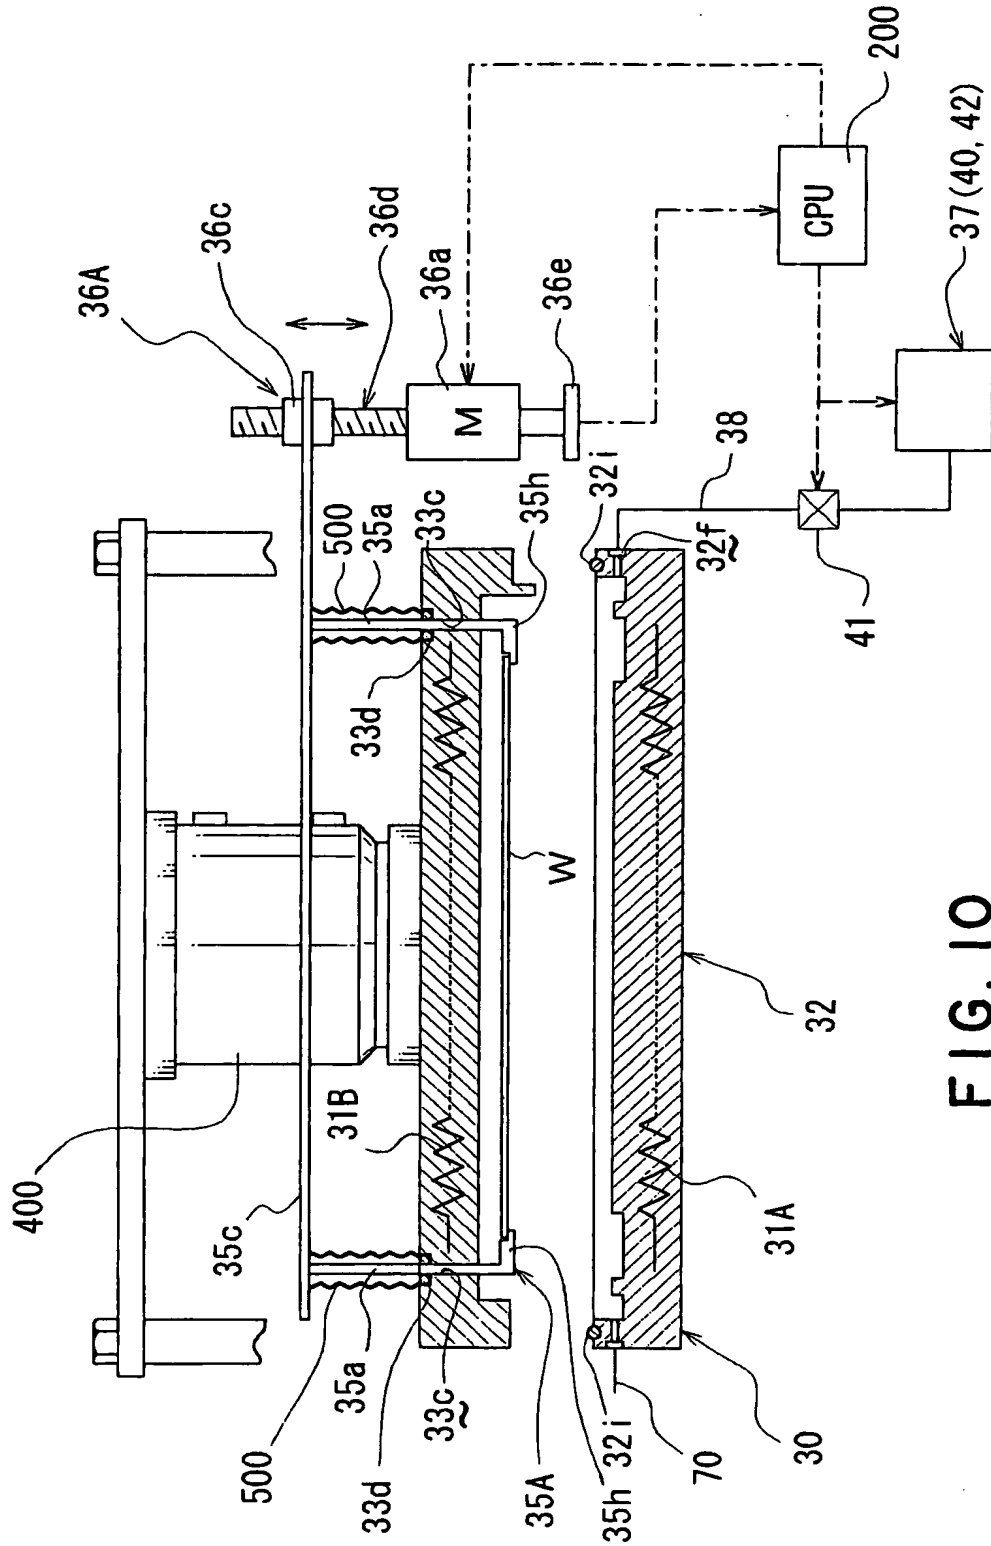


FIG. 10 is a perspective view of a cylindrical member 35. The member has a central longitudinal slot 35i and a circular hole 35a on its side. A dashed line 35A indicates a curved surface or boundary. A wavy line W is shown at the bottom. Labels 35j and 35h point to the left and right sides of the member respectively.

FIG. 11B

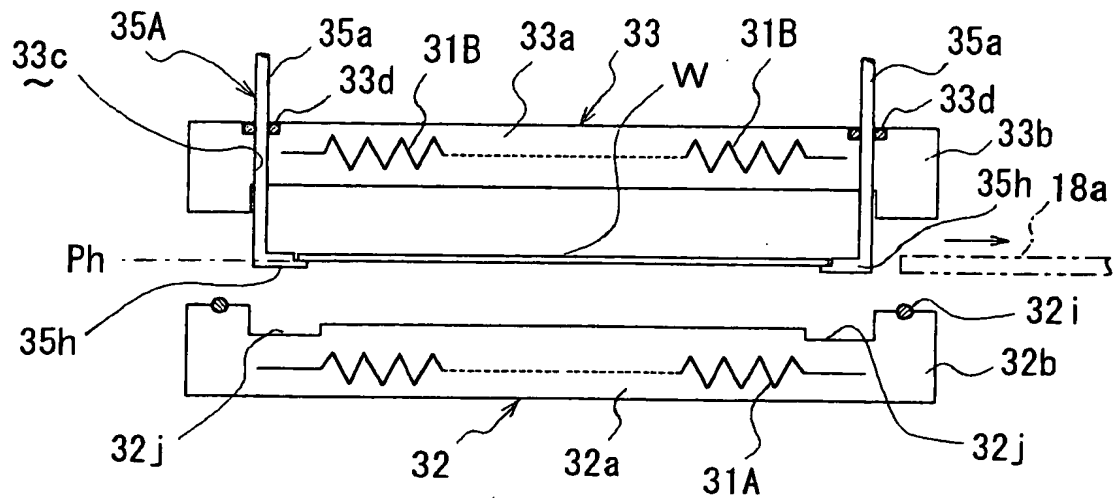


FIG. 12A

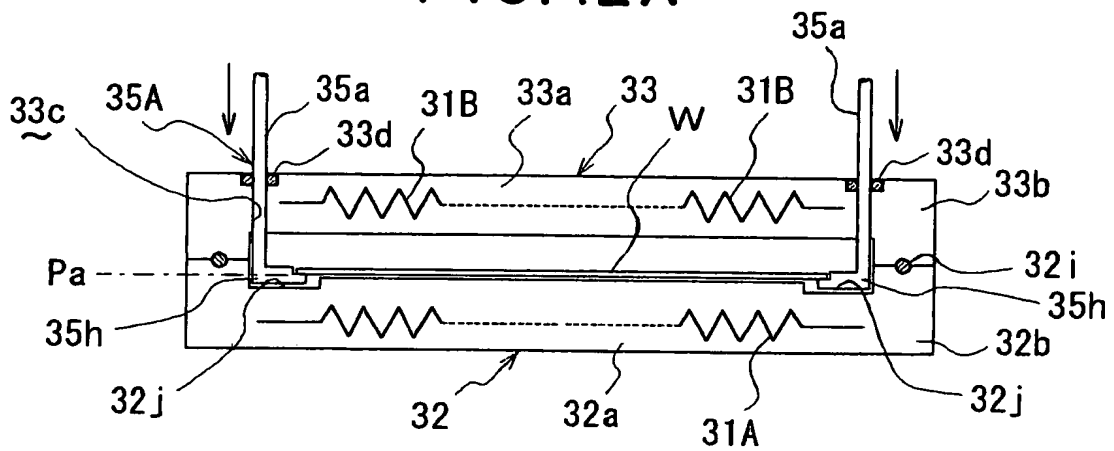


FIG. 12B

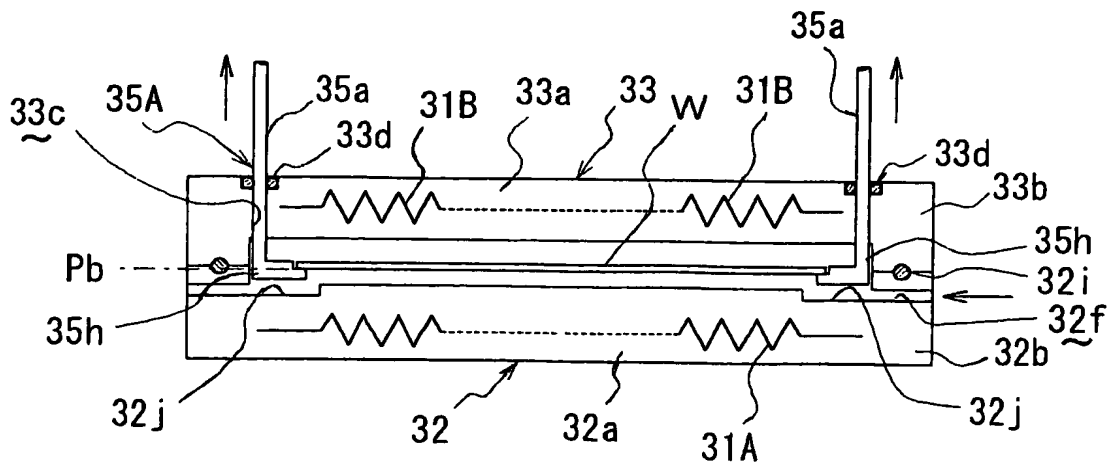


FIG. 12C

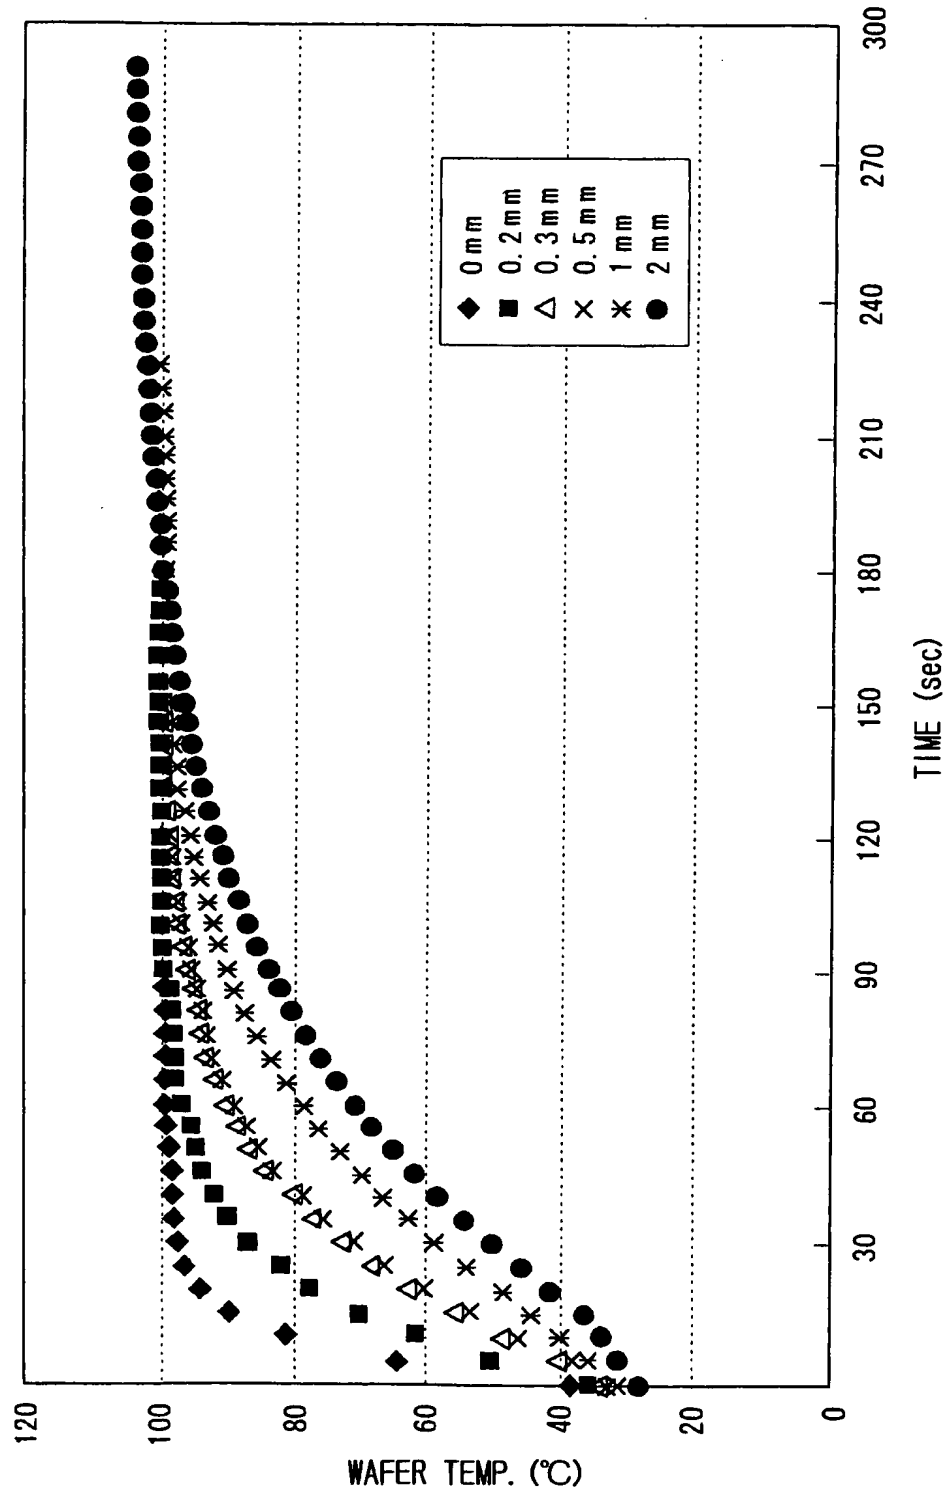


FIG. 13